


Hold open arm

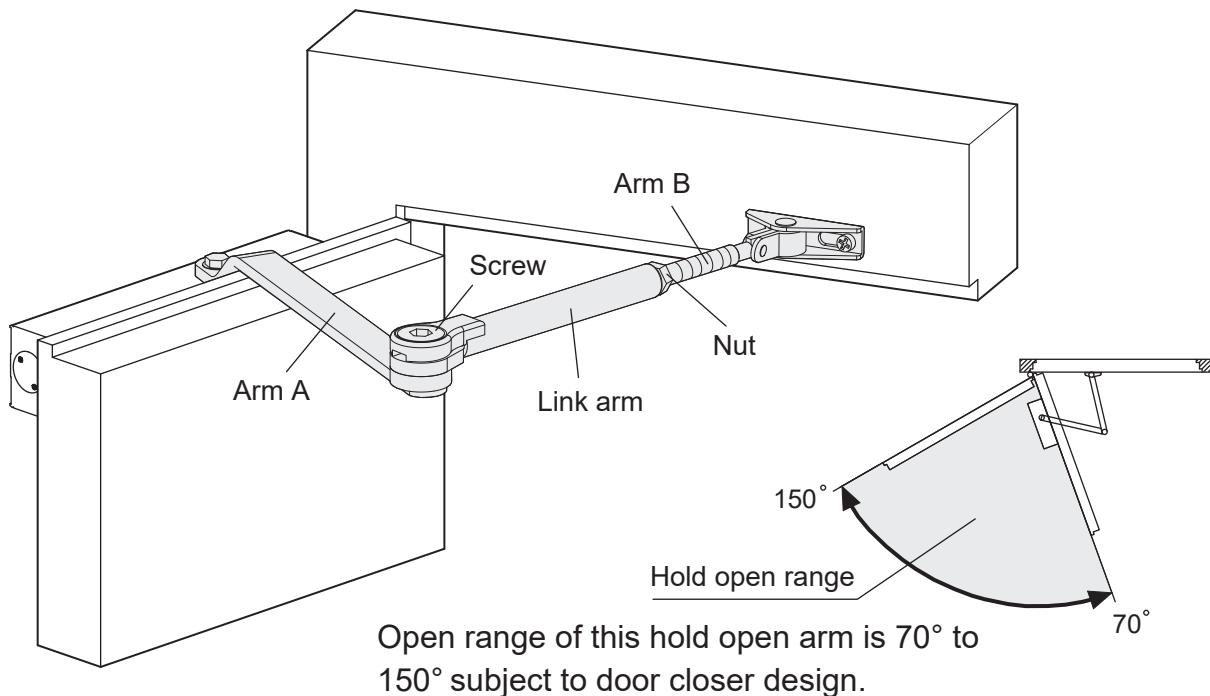

Mounting instructions

Door closers with hold open arm are mounted in the same way as door closers with standard arm (see mounting instructions of door closer).

★This hold open arm is only for standard door mount on pull side application.

Setting the hold open angle

After door closer and hold open arm are mounted, open door and keep it in the hold open position desired. Tightly fix hexagonal screw (with Allen key SW5).

Readjusting the hold open angle


Bring door leaf in adjusted hold open position. Loosen hexagonal screw with approx. 3 complete turns.

Move door leaf to new hold open position. Fix hexagonal screw again tightly with Allen key SW5.

Mind that fixing hexagonal screw and nut are tightened fast.

Adjusting the hold open function

1. Take off the nut, and separate arm B from link arm.
2. Find adjusting screw inside link arm, use a screwdriver to turn the adjusting screw to right or left hand side so that the strength of the hold open will be adjusted.
3. After the adjustment, assemble the arm again, and make sure that all the parts are in the right position.



It is not allowed to use the hold open arm on tested smoke and fire control doors.